


ELECTRICAL TEST:


1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE:5 OHM MAX
3. INSULATION RESISTANCE:10M OHM MIN
4. HI-POT TEST:DC 300V/10ms
5. PASS 4K@60HZ TEST

CONSUMER ITEM	LENGTH (mm)
ENOVA - EC-H1-5	5000 ± 50

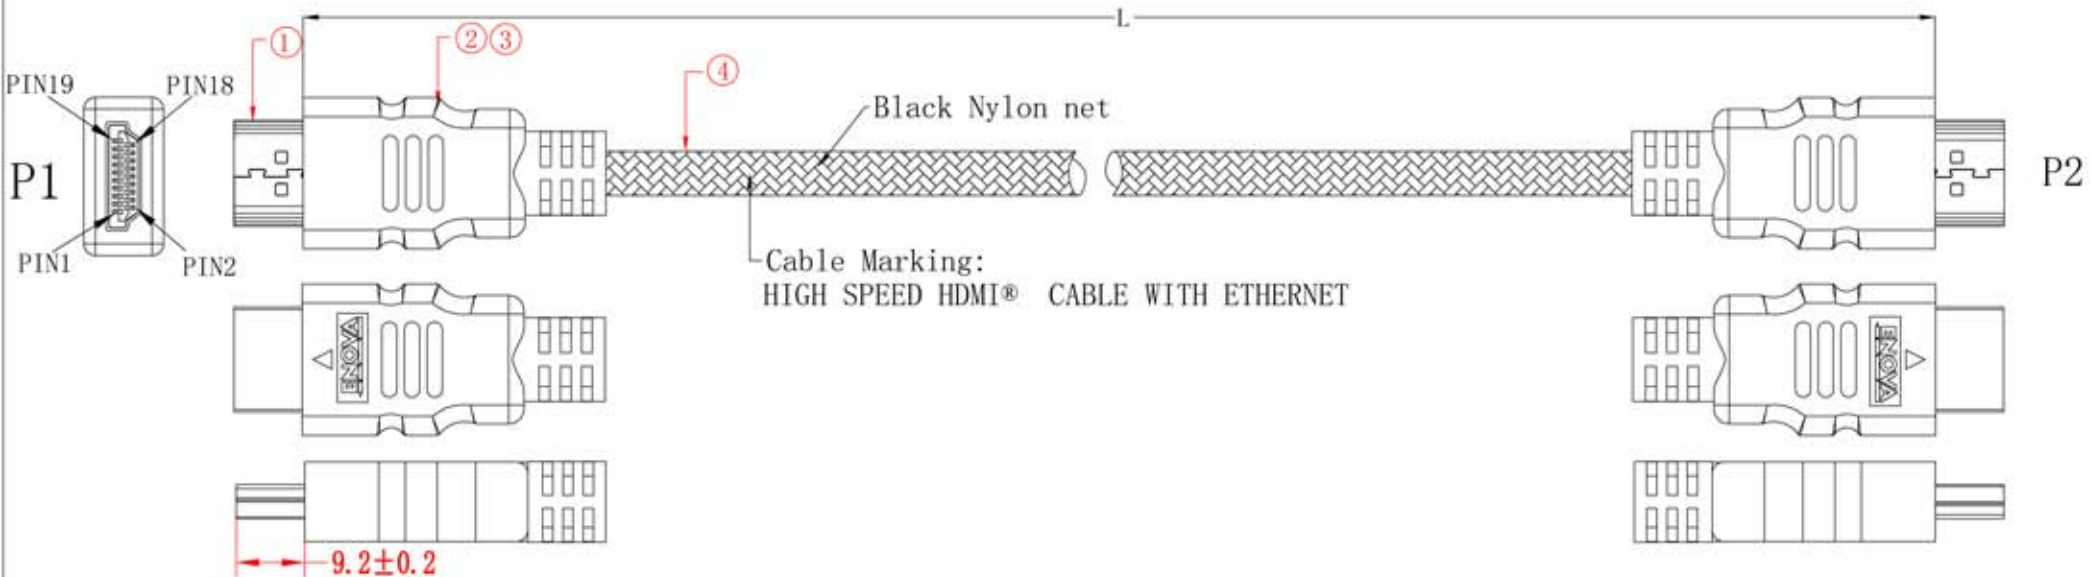

PIN Assignment

P1 HDMI AM	P2 HDMI AM
1	1
3	3
5	5
4	4
6	6
2	2
7	7
9	9
11	11
10	10
12	12
8	8
14	14
19	19
17	17
13	13
15	15
16	16
18	18
SHELL	SHELL

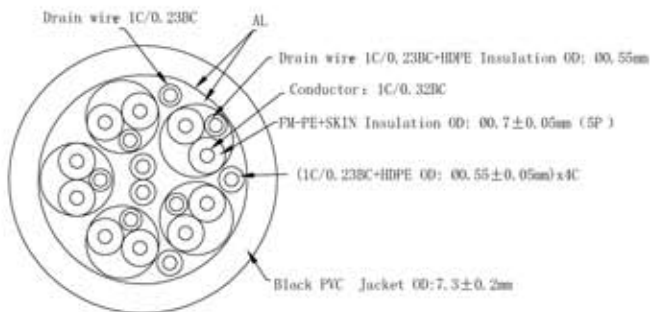

④	CABLE	2.0V HDMI 28-30AWG BC 19+1 [(1C/0.32BC*1P+D1C/0.23BC+AL)*5P+1C/0.23BC*4C +D1C/0.23BC]+AL+BLACK PVC OD : 7.3 ± 0.2mm	m
③	MODEL	Black 45P PVC	g
②	MODEL	PE, Nature color	g
①	plug	HDMI AM 19P PIN:G/F, SHELL:Gold plated	2PCS
NO.	PART NAME	DESCRIPTION	UNIT

ENOVA				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.	ENOVA - EC-H1-5	△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
		HENRY	L. H. R	FINISHING MATERIAL		△	2020/08/07		A1
						SYM	DATE		REVISION